

PRODUCT SPECIFICATION

ALKALINE 9V BATTERY

Type Designation : 6LR61/ 9V

Prepared by : 裴敏

Checked by : 张亮

Approved by : 张亮

Issued Date : 2019-01-01

Immense Power Pvt Ltd.

Address: 1, DDA COMMERCIAL COMPLEX CHITRA VIHAR VIKAS MARG, Delhi- 92.

Tel: 0091-11-22016083 0091-11-22015963

E-mail: sales@immense.in

Website: www.immense.in

Model No.: 6LR61

Document No.: JSS221.2019

1. Scope:

This specification is applicable to Immense Alkaline cell, 6LR61 (Mercury and Cadmium free) distributed by Immense Power Pvt Ltd.

2. Law & Regulation Compliances:

This product complies with EU's battery directive (2006/66/EC).

Packaging materials comply with EU's directive on packaging materials and waste (94/62/EC)

3. General:

Type designation

IEC/ JIS	6LR61
ANSI	1604A
Common	9V

Chemical system: Zn/KOH-H₂O/MnO₂



Nominal voltage: 9.0 V

Weight: Approximate 44.0 g

Dimension (mm)

The dimensions shall be in accordance with the below figures both prior to and after service output test. Measuring equipment shall be with an accuracy $\pm 0.05\text{mm}$ at least.

/	min	max
H	46.5	48.5
S	-	46.4
F	12.45	12.95
L	24.5	26.5
W	15.5	17.5

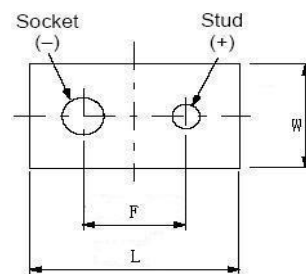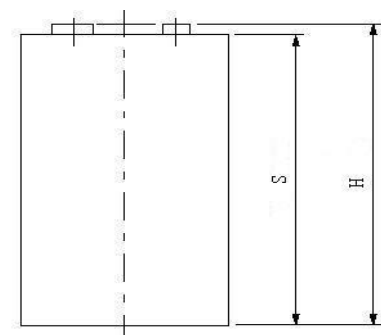

Capacity: Approximate 500mAh (35mA, 24h/d, 20°C, e.v.= 5.4V)

Operation temperature : -18°C~50°C

Recommend storage temperature : Not exceed 30°C

Model No.: 6LR61

Document No.: JSS221.2019

4. Appearance

The battery visually inspected by unaided eye 30cm away from battery. The battery shall be free from dents, scratch, rust and extruded internal compounds, such as sealing compounds and etc, and serious displacement of artwork. Appearance defects shall not be observed that may adversely affect actual use or performance of batteries.

5. Electrical Characteristics

Unless otherwise stated, all measurements are to be performed at a **Standard Environment** of

20 ± 2°C
55 ± 20% RH.

All samples are normalized for 8 hours at least at the above environment prior to measurement. The digital voltmeter (DCM) is with the precision of 1mV (internal resistance not less than 1 Megohm). The load resistance of the total circuit is accurate within ±0.5% of the specified value.

Open circuit voltage and closed circuit voltage (Load resistance 180Ω, 0.3S)

/		OCV(V)	CCV(V)	S.C.(A) (reference)
Initial	Min	9.2	8.8	3.0
	Normal	9.6	9.4	4.5
Stored 1 year	Min	9.0	8.5	2.0
	Normal	9.4	9.2	3.5

Service output

Load		35mA	270Ω	620Ω	Background ³ : 10 000Ω Pulse:620Ω
Test mode		24h/d	1h/d	2h/d	24h 1 s per h
End voltage		5.4V	5.4V	5.4V	7.5V
Applications		Reference	Toy	Radio	Smoke detector
Unit		h	h	h	d
Initial	MAD	13.5	17.5	43.5	17.5
	Normal	15.0	19.5	47.0	20.0
Stored 1 year	MAD	12.0	16.5	42.0	16.0
	Normal	14.0	18.5	45.0	18.0

m: minute h: hour d: day

Remark: 1) The initial discharge test shall commence within 30 days of manufacture. During stored period, the cells shall be stored under room temperature conditions.

2) Lot release service output test is conducted by 35mA continuous discharging to 5.4volts
- The batteries shall not leak during the service life test before the end voltage reached.

3) The pluse load alone shall be applied across the battery. It is the effective load. It is not added in series or parallel to the Background load.

Model No.: 6LR61

Document No.: JSS221.2019

6. Leakage Resistance

Over discharge leakage test

Test conditions: 20±2°C & RH 60±15%, 35mA continuous discharge 48h.

Number of test samples: 9 batteries

Requirement: No visible leakage; No explosion.

High temperature leakage test

Test conditions: store 20 days under 60±2°C, then store 4~24h under standard environment.

Number of test samples: 24 batteries

Requirement: No visible leakage; No explosion.

7. Security Characteristics

User Drop Test

This test simulates the situation when a battery is accidentally dropped.

Test conditions: Undischarged test batteries shall be dropped from a height of 1 m onto a concrete surface. Each test battery shall be dropped six times, once in each face. The test batteries shall be stored for 1 h afterwards.

Number of test sets: 5 batteries

Requirement: No fire, No explosion or leakage.

Short-circuit explosion-proof characteristics

This test simulates an external short circuit of a battery during daily handling of batteries.

Test conditions: Positive and negative terminals of an undischarged battery shall be connected directly. The circuit shall be completed for 24 h or until the battery case temperature has returned to ambient. The resistance of the inter-connecting circuitry shall not exceed 0,1 Ω.

Number of test samples: 5 batteries

Requirement: No fire or explosion; Leakage is allowable.

8. Expiry Date:

5 years

9. Expiry Date Marking:

Unless otherwise specified, each battery will carry a manufacturing date code followed by month and year of manufacturing for domestic and manufacturing date code followed by month and year of expiry for export. (Shelf life 5 years)

For private label, can mark according to customer's requirements.

10. Packaging Requirements

The total of heavy metal lead, cadmium, mercury, and hexavalent chromium concentration shall not exceed 100 ppm in Packaging materials and printing inks. Ozone depleting substances (ODS) shall not be used in the manufacturing of any packaging.

The printing on each cell label is legible and permanent. Label defects, if any, shall conform to mutually agreed upon limit samples.

Model No.: 6LR61

Document No.: JSS221.2019


It is recommended that packaging for shipment and sales according with Packaging Specification of Immense alkaline cell. For example, 1pc battery in a blister, 30 blisters in a display box, 4*2*1 display boxes in a final outer carton, and 4*2*4 outer cartons on a pallet. Flow chart as follows:

Otherwise packaging for shipment and sales shall conform to the mutually agreed to Packaging Specification of the designated customers.

Model No.: 6LR61


Document No.: JSS221.2019

1

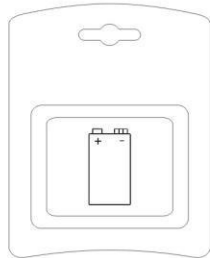


6LR61 1pcs-card

2

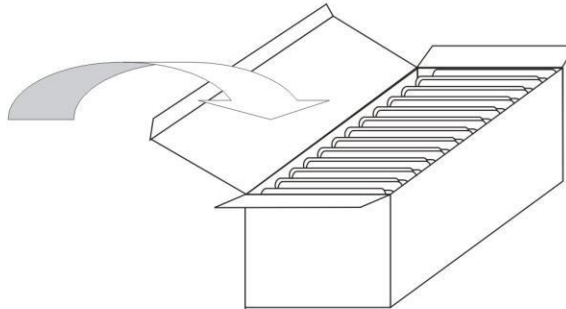

30 cards in a display box


3

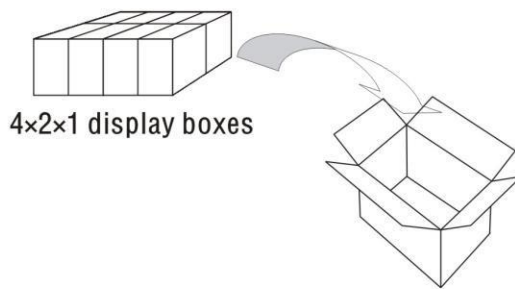

4x2x1 display boxes

outer carton


4

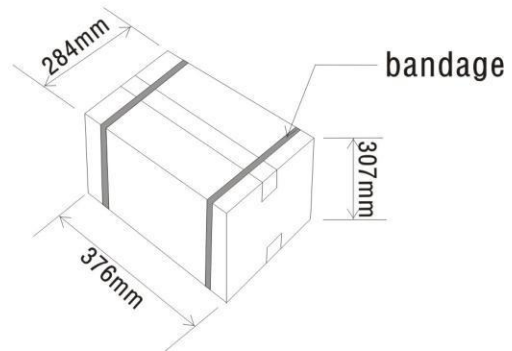

bandage

Gross weight: about 13.9kg

5

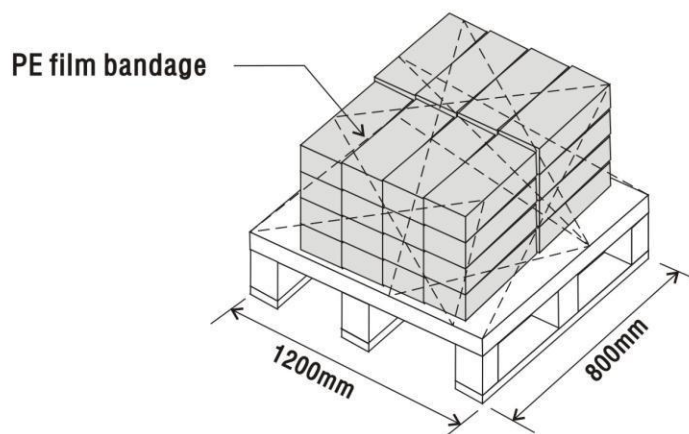

PE film bandage

(4x2x4) outer boxes

Model No.: 6LR61

Document No.: JSS221.2019

11. Component / Information of Ingredients

Chemical Nature: Alkaline zinc-manganese dioxide batteries

MATERIALS	APPROXIMATE PERCENT OF TOTAL WEIGHT (%)	CAS NO.	MATERIALS	APPROXIMATE PERCENT OF TOTAL WEIGHT (%)	CAS NO.
Manganese Dioxide (MnO ₂)	~34.0	1313-13-9	Brass	~4.3	12597-71-6
Zinc Powder (Zn)	~13.0	7440-66-6	Fe	~28.0	7439-89-6
Water (H ₂ O)	~6.1	7732-18-5	Ni-plating	~0.3	7440-02-0
Potassium Hydroxide (KOH)	~1.5	1310-58-3	Bi	~0.0027	7440-69-9
Carbon	~1.96	7782-42-5	In	~0.0027	7440-74-6

Chart 1. Discharge diagram

